

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number  
**WO 01/22900 A1**


- (51) International Patent Classification<sup>7</sup>: **A61C 5/14**, (74) Agent: **SPRUSON & FERGUSON**; GPO Box 3898, Sydney, NSW 2001 (AU).  
A63B 71/10
- (21) International Application Number: **PCT/AU00/01166** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date:  
26 September 2000 (26.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
PQ3121 27 September 1999 (27.09.1999) - AU
- (71) Applicant (*for all designated States except US*): **SIGNATURE MOUTHGUARDS PTY LIMITED [AU/AU]**; Level 1, 9 Carlotta Street, Artamon, NSW 2064 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **BURNS, Peter [AU/AU]**; Level 1, 9 Carlotta Street, Artamon, NSW 2064 (AU).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *With international search report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: A MOUTHGUARD

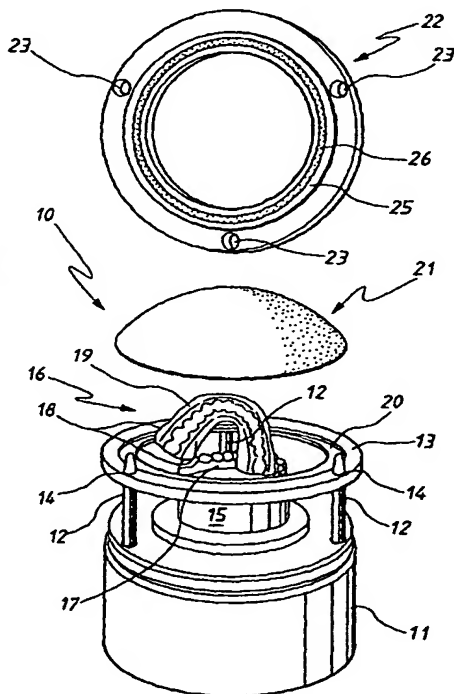

(57) Abstract: A method to form a mouthguard, said method including the steps of providing a mould (14) to which a mouthguard shell (16) is applied. A sheet member (21) of resilient material is applied to the shell (16) and plastically deformed by applying a pressure differential across the sheet to thereby urge the shell (16) into contact with the mould (29) to plastically deform the shell (16) to form a mouthguard.

WO 01/22900 A1